

LOADALL | AGRICULTURAL RANGE



SERIES III **AGRI LOADALL**



STAGE V

POWER RATING
109 - 173hp

LIFT CAPACITY
3,200kg - 6,000kg

LIFT HEIGHT
6.2 - 9.8m

THE WORLD'S NO.1 AGRICULTURAL TELESCOPIC HANDLERS.

Our Stage V Series III Loadalls are the telescopic handler of choice for agriculture, with a range of models for any application.



OUR BEST CAB EVER.


Our all-new CommandPlus cab provides operators with the best-in-class cab space, noise level and all-round visibility, plus our command driving position.



BEST-IN-CLASS VISIBILITY

Industry-leading visibility with new seamless one-piece, multi curved glazing, increasing front visibility by 14%.

All controls are close to hand and clearly visible to the operator.

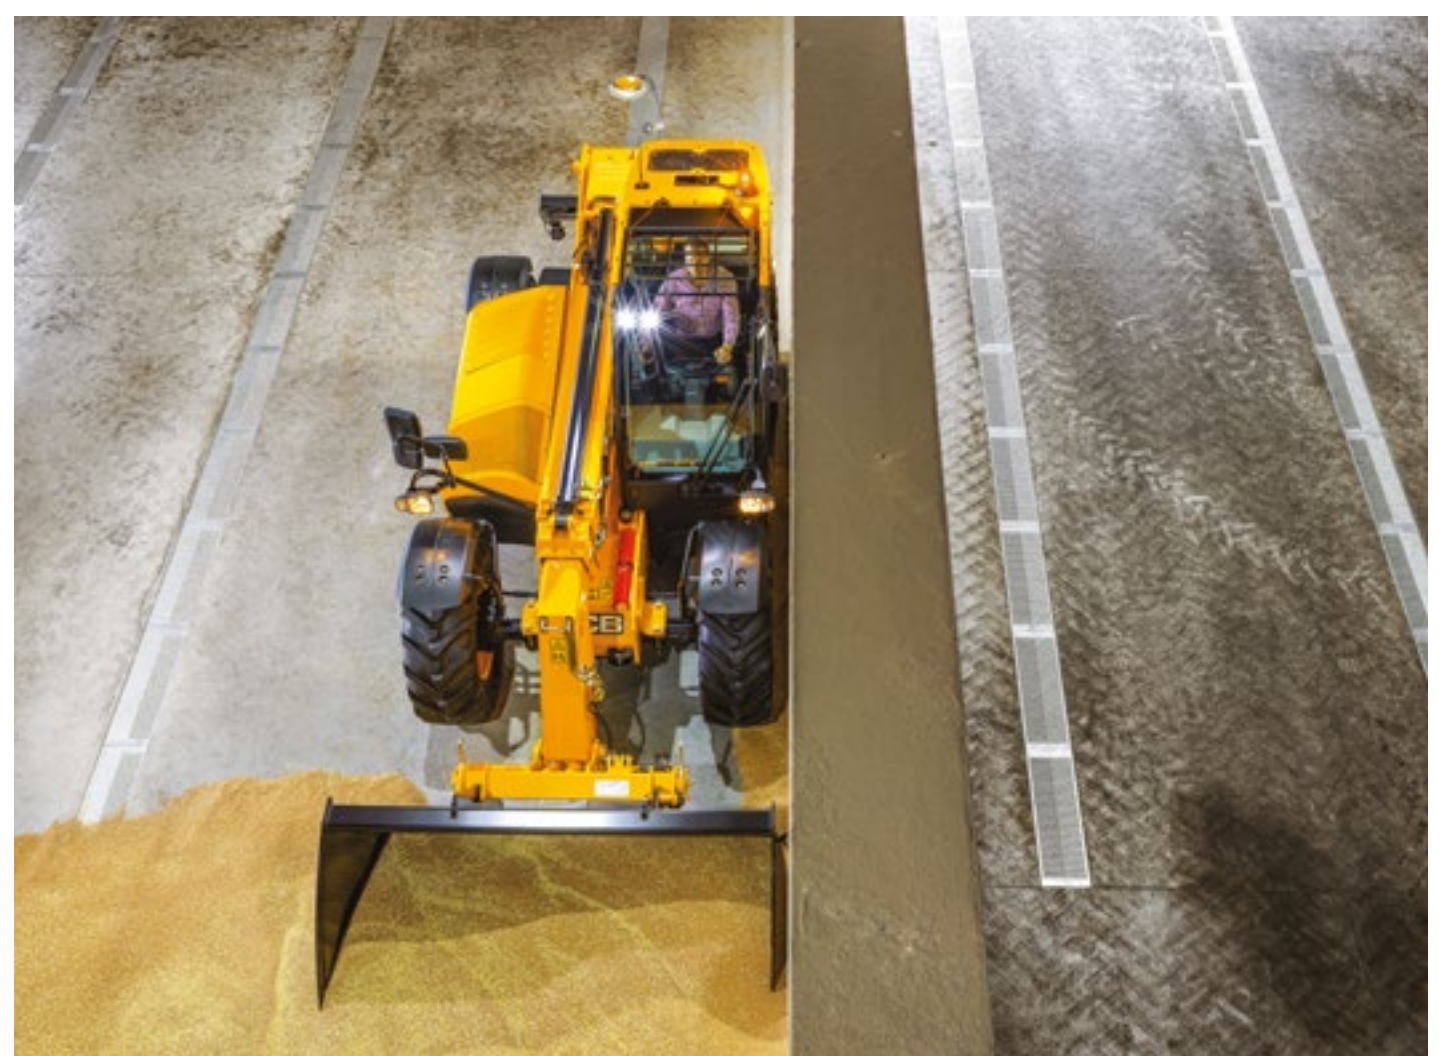

OUR BEST TRANSMISSIONS.

Our range of transmission options are tailored to your specific agricultural requirements, ranging from TorqueLock, PowerShift, AutoShift and the award winning DualTech Variable Transmission.



Enjoy Four Wheel Drive (4WD) as standard, Two Wheel Drive (2WD) at the press of a button, and the option of Limited Slip Differential (LSD), assuring traction at all times.

OUR BEST ENGINES.

Our 4.8-litre DIESELMAX engines meet the latest EU Stage V regulations with ultra-low emissions, auto-stop technology, low fuel consumption and next generation particulate control.



POWER FOR ALL APPLICATIONS

- 109hp / 81kW (516Nm)
- 130hp / 97kW (550Nm)
- 150hp / 112kW (600Nm)
- 173hp / 129kW (690Nm)



OUR BEST HYDRAULICS.

Our regenerative hydraulics system, auto bucket rattle, auxiliary venting, boom end damping and auto SmoothRide System all form part of the JCB Smart Hydraulics package.




- Constant flow auxiliary for hydraulically powered attachments.
- Up to 160 litre per minute variable displacement piston pumps*.

*model dependant.

OUR BEST SAFETY FEATURES.

Our patented Adaptive Load Control System allows the operator to drive seamlessly without hindering productivity and ensuring stability.

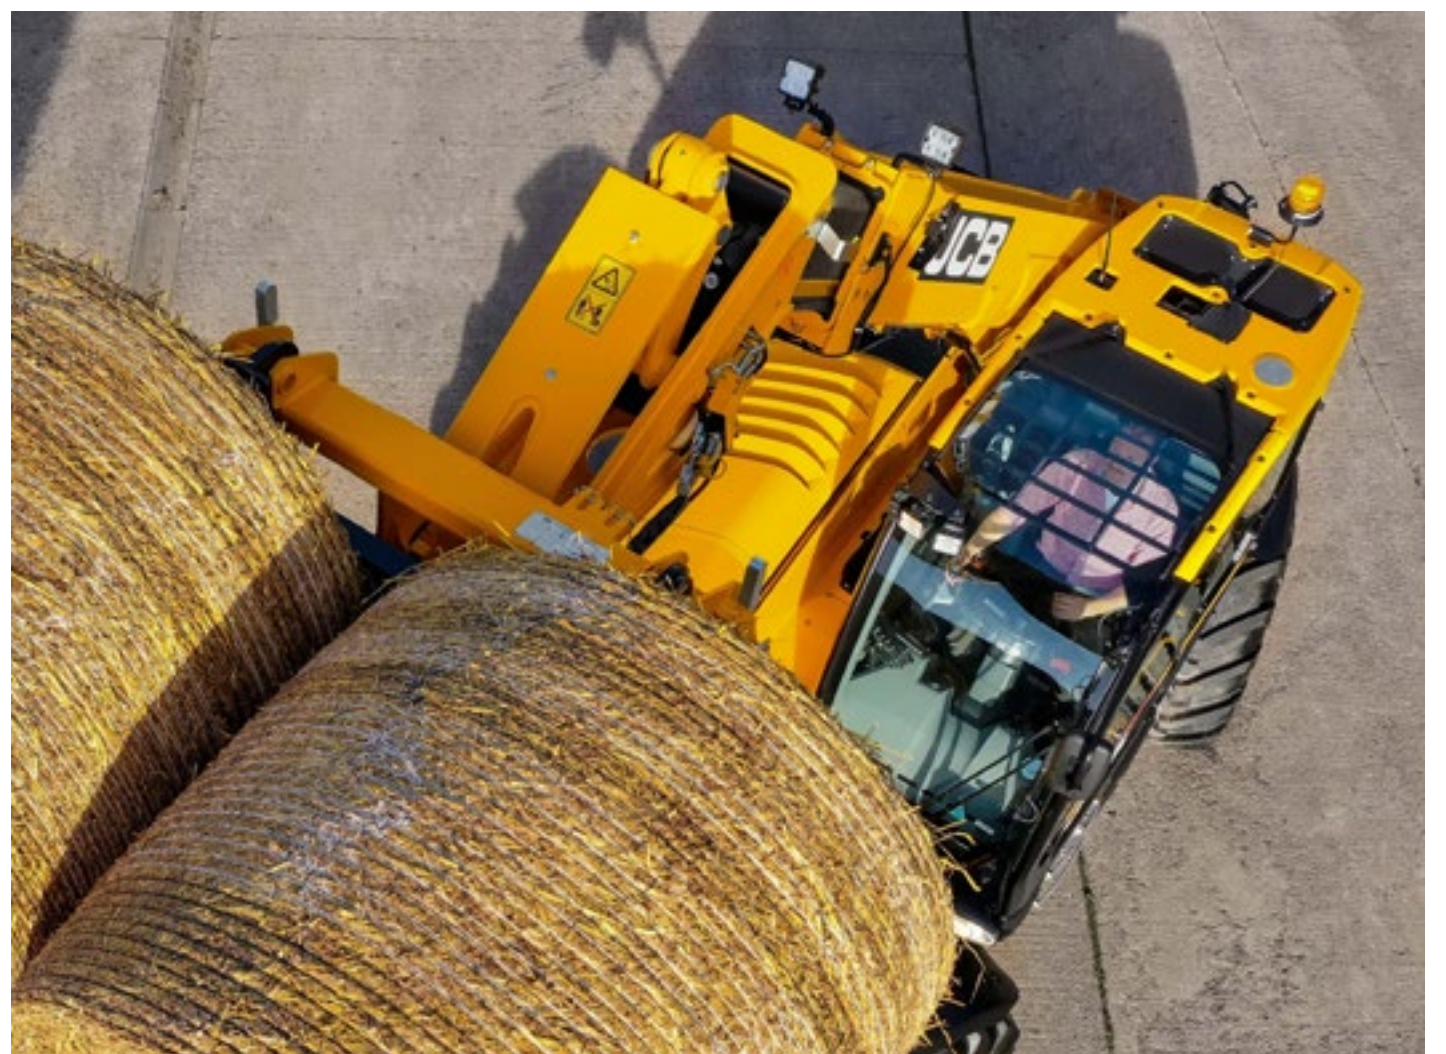

BETTER ALL-ROUND VISIBILITY

Low boom pivot point, excellent right hand visibility over the engine pod with LED work lights to the front, rear, boom and hitch to optimise visibility in dark conditions.



LOADALL | AGRICULTURAL RANGE



SPECIFICATION.

MODEL		532-60	538-60	532-70	538-70	542-70	536-95	542-100	560-80
Lift height	m	6.22	6.23	7	7.01	7.01	9.49	9.8	7.9
Lift capacities	kg	3200	3800	3200	3800	4200	3600	4200	6000
Lift capacity at full height	kg	3200	3800	2750	2500	2750	2000	1800	3000
Lift capacity at full reach	kg	1400	1550	1675	1400	1675	575	600	1750
Forward reach at max height	m	0.87	0.87	0.48	0.48	0.48	2.43	2.36	0.92
Reach with 1 tonne payload	m	3.33	3.34	3.72	3.37	3.73	5.09	5.15	4.48



STANDARD FEATURES.

- New JCB DIESELMAX Stage V compliant engine
 - CommandPlus Cab
 - Powershift and DualTech Variable Transmissions
- Front / rear hydraulic auxiliary
 - Smart Hydraulics
 - Up to 11 LED worklights
 - European tractor homologated



SERIES III AGRI LOADALL

STAGE V

MORE POWER. MORE TORQUE. MORE DUALTECH.

SERIES III **AGRI LOADALL**

REQUEST A QUOTE



www.jcb.com

